

Logico wall

Logico mini wall

Logico micro wall

design

Michele De Lucchi
Gerhard Reichert
2001, 2002

Artemide[®]
www.artemide.net

Awards

Design Innovationen Design Zentrum
Nordrhein Westfalen
Reddot Design Award
2002 - Essen (Deutschland)

Light emission



Wall mounted luminaires for diffused incandescent or fluorescent lighting for applications with a single diffuser unit or with an assembly of three diffuser units in a horizontal linear configuration.


Materials: diffuser in handblown venetian glass with satinéd finish • concealed wall plate support in silver grey lacquered steel • mounting to standard electrical junction boxes and with provisions for additional wall fastening for the triple configurations • can be mounted in downwards or upwards position with supplied clip

Appliques murales à éclairage fluorescent ou incandescent diffus; installation simple ou multiple permettant l'assemblage de trois plafonniers pour obtenir une configuration en rangée.

Luminarias de pared para iluminación incandescente o fluorescente difusa para utilizar con un solo difusor o con un conjunto de tres difusores ordenados de forma lineal horizontal.

Matériaux: diffuseur en verre soufflé à la main au fini satiné • support mural dissimulé, fait d'acier laqué gris argenté • se fixe aux boîtes de connexion électrique standard, comprend également tout le nécessaire pour l'installation murale triple • peut être installé vers le haut ou vers le bas au moyen de l'agrafe qui est fournie

Materiales: difusor de vidrio veneciano soplado a mano con acabado satinado • soporte de placa de pared oculta de acero laqueado de color gris plata • montaje en cajas de conexiones eléctricas estándar y accesorios para montaje de configuraciones triples • se puede colocar hacia abajo con la presilla provista



Logico wall single


incandescent source

• 2 x 75W (E26/A19)

or

fluorescent source

• 2 x 18W (G24q-2/T4)



Logico mini wall single

incandescent source


• 1 x 75W (E26/A19)



or

fluorescent source

• 2 x 13W (G24q-1/T4)



Logico micro wall single

incandescent source


• 1 x 60W (E12/G16 1/2)

or

fluorescent source


• 2 x 13W (G24q-1/T4)



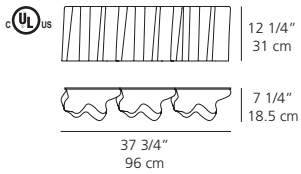


Logico wall triple


incandescent source

- 6 x 75W (E26/A19) 

or


fluorescent source

- 6 x 18W (G24q-2/T4) 

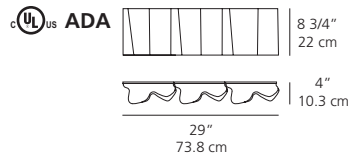


Logico mini wall triple


incandescent source

- 3 x 75W (E26/A19) 

or


fluorescent source

- 6 x 13W (G24q-1/T4) 

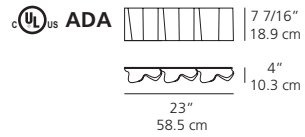

Logico micro wall triple

incandescent source

- 3 x 60W (E12/G16 1/2) 

or

fluorescent source

- 6 x 13W (G24q-1/T4) 